

PROCESS TO CHANGE THE AIR BUTTON

1. UNPLUG AND ISOLATE THE PUMP OR LIGHT FROM THE ELECTRIC POWER SOURCE
2. USING A FLAT BLADE SCREWDRIVER, CAREFULLY LIFT THE SWITCH TRIM UP OFF OF THE DECK SURFACE [PHOTOS 1A, 1B, 1C & 1D]



3. CAREFULLY REMOVE THE TUBING FROM THE UNDERSIDE OF THE AIR BUTTON BODY



4. REMOVE THE PANEL NUT FROM THE UNDERSIDE OF THE SWITCH BODY [PHOTOS 2B]




5. REMOVE THE SWITCH FROM THE TUB DECK [PHOTOS 2C & 2D]



6. REVERSE THE PROCESS TO INSTALL A NEW AIR SWITCH.

7. CONNECT THE TUBING TO THE UNDERSIDE OF THE SWITCH [AS SHOWN IN PHOTO 2A] AND TO THE AIR RELAY IN THE PUMP CONTROL BOX [PHOTOS 3A & 3B]

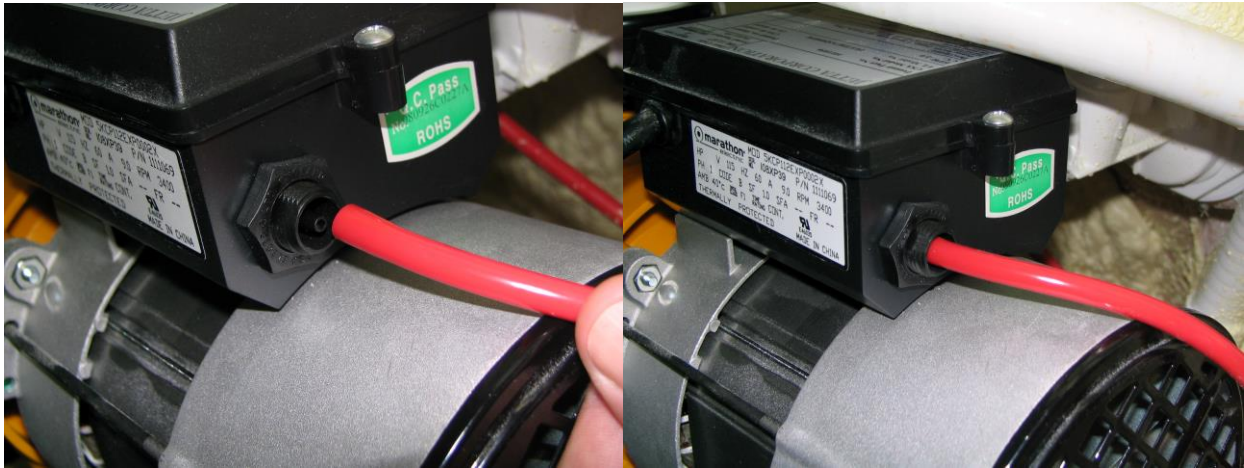

8. CONNECT THE PUMP OR LIGHT INTO A POWER SOURCE AND TEST FOR PROPER OPERATION – FOR PUMP TEST YOU MUST FILL THE TUB TO THE APPROPRIATE LEVEL WITH WATER.